


INSPECTION BELT

In various parts of processing lines, there is a need to inspect the product for quality reasons or for final product reasons. The Inspection Belt can be modified and adopted to each line and product requirement. The stainless-steel

framework has an eyelink belt as standard. The speed of the belt is adjustable. As optional the inspection belt can be supplied with other belt types or working platforms etc.

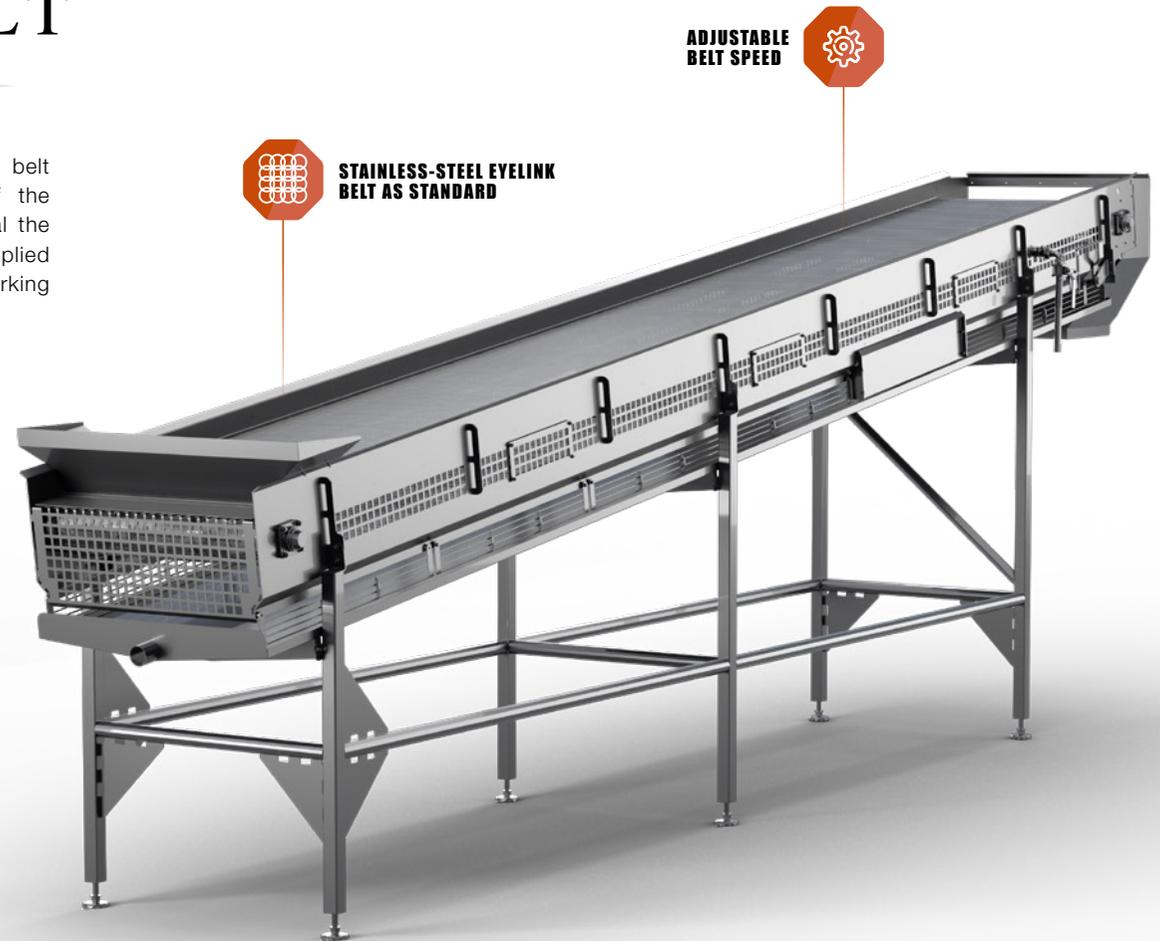

**STAINLESS-STEEL EYELINK
BELT AS STANDARD**



**ADJUSTABLE
BELT SPEED**

INSPECTION BELT ADVANTAGES

Stainless-steel eyelink
belt as standard

Adjustable Belt Speed


SIDE



FRONT



INSPECTION BELT	L (mm)	W INFEED (mm)	H INFEED (mm)	INSTALLED POWER
IBS1020	2780	800	As Desired	0,75 kw
IBS1230	3650	1200	As Desired	0,75 kw
IBS1030	3640	950	As Desired	0,75 kw

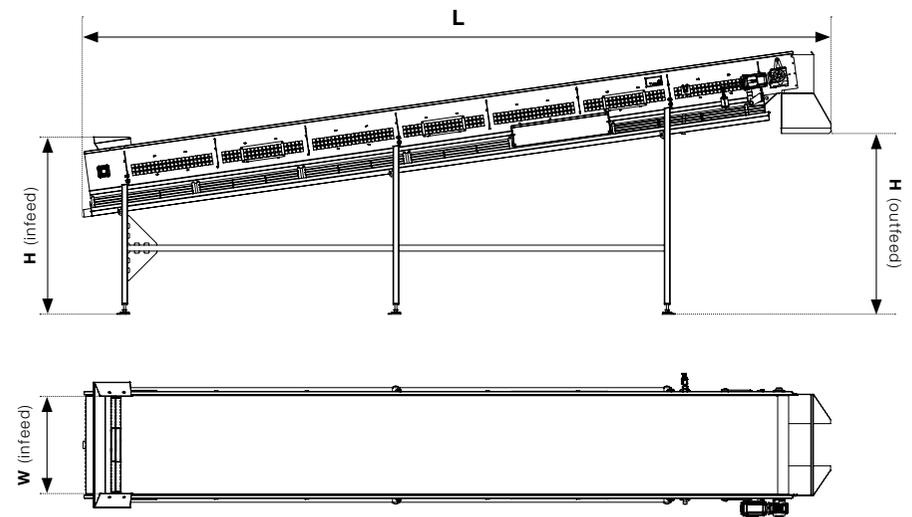

Rosenqvists Food Technologies • Väverigatan 2
SE 291 54 Kristianstad • Sweden • T: +46 44 590 41 40

www.rosenqvists.com

